

MOUNTAIN BIKE COUNTER

Generation 4.1

Key Info

- Optimized to detect and count bicycles on trails
- Advanced microelectronic design
- Self-contained design; no external wires or tubes
- Designed to be buried
- Small and easy to hide reduces vandalism risk
- Long battery life (up to 9 months)
- Large storage capacity (millions of counts)
- Built for outside: -40C to +55C
- Low installation, operating, and maintenance costs
- Field-proven, Generation 4 design (>10 year history)



TRAFx Counting System

TRAFx Dock

To download counters in the field (without PC)

To configure counters (with PC)



TRAFx DataNet

To view and manage your data



To produce professional reports in seconds.



Try the free Demo at www.trafx.net

Designed to be Buried

This counter is designed to be buried beside or in the middle of a trail, depending upon the trail's width. When a bike passes, an aerospace-quality

magnetometer coupled with advanced embedded processing software, detects and records a count. It is mainly intended for mountain bike trails, but can also be installed on regular bicycle paths under 2m wide.

Quick Installation

he low-power design ensures battery efficient operation, and because it is small, this counter is quick to install. It uses three standard "C size" alkaline batteries.














MOUNTAIN BIKE COUNTER

Generation 4.1

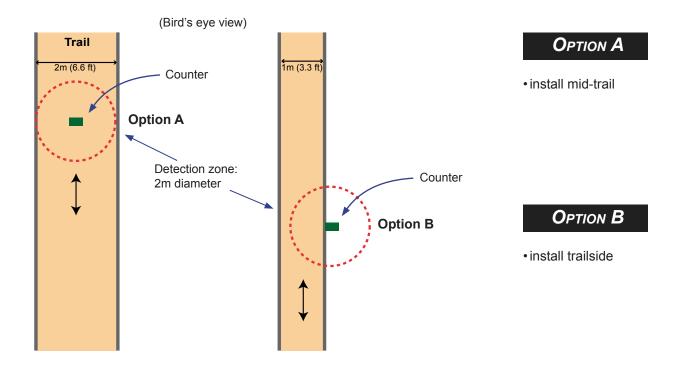

FEATURES

- · Hourly or daily totals, or timestamps
 - -14 000 hourly or daily totals = > 400 million counts
 - -14 000 timestamps
- Flexible installation options (see above)
- · Proprietary design for detecting bicycles
- · User programmable modes/settings
 - -Programmable settings include:
 - *Real-time clock
- *Start date/time
- *Detection range
- *Digital sampling parameters

"3-in-1 design!"

- *Delay after event *Site/counter name
- Three colour-coded LEDs indicate status of operation -green light flashes upon detection
- Digital readout of battery voltage level (e.g., 4.2V)
- Automatic low battery warning
- · User replaceable parts
- · Engineered and built in the Canadian Rockies

TRAFX VERSATILITY

The TRAFx Mountain Bike Counter comes pre-programmed and ready to use as the TRAFx OHV Counter or the TRAFx Vehicle Counter, at no extra charge. Simply change the mode when configuring the counter.

Also, it can be quickly and easily converted to the TRAFx Infrared Trail Counter by ordering a special conversion kit.

Visit www.trafx.net for details

SPECIFICATIONS

CASE: 14cm x 10.5cm x 5cm; weatherproof

WEIGHT: 250g (without batteries)

POWER: Three "C size" alkaline batteries (e.g., Energizer) BATTERY LIFE: 8 to 9 months max. with three C alkalines 20 months max. with one D lithium (custom.)

DETECTION RANGE: 2m; see diagrams above

DATA TYPE: ASCII; .txt file type

DIGITAL MEMORY DESIGN: Data and settings are retained even

when batteries are replaced or die

TIME KEEPING: Quartz clock; 10ppm accuracy @ 20C

OPERATING TEMPERATURE: -40C to +55C SENSOR TYPE: Low-field geomagnetic

COMMUNICATIONS: RS232 serial; 115,000 baud

OTHER: Gold-plated circuitboard; two coats silicon (anti-moisture); ESD protection and short circuit protection; RoHS (lead-free) LIMITED WARRANTY: 1 year; covers manufacturing defects. EMI

COMPLIANCE: FCC, IC, CE

ACCESSORIES/OPTIONS

- · LCD tally display · IR conversion kit
- Extended 5-year warranty

Ballinger Technology

Unit 20. 23 Heyington Avenue Thomastown Vic 3074

T: (03) 9386 8722

E: sales@ballingertech.com.au

